



DIMENSIONS

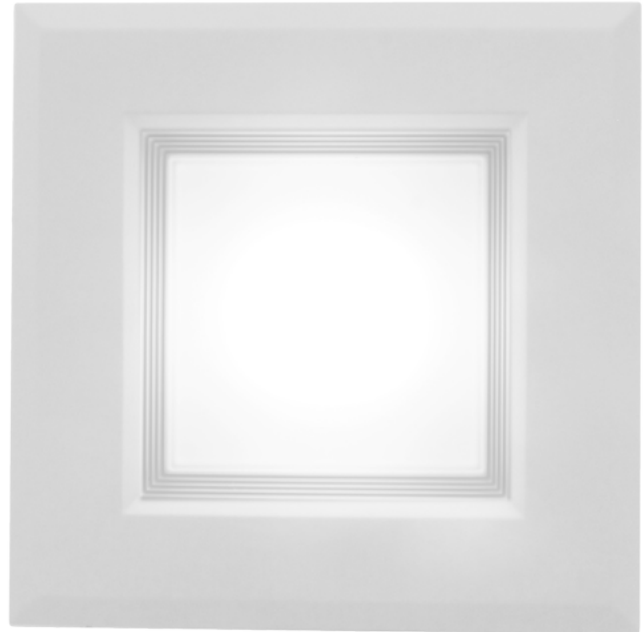


TRIM OPTIONS

WHITE
BAFFLE

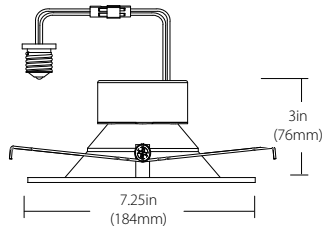

NICKEL



OIL RUBBED
BRONZE



BLACK




Part of the D-Series, the DQR6 takes everything you love about NICOR's recessed downlighting family with the added design aesthetic of a square trim. Compatible with most 6" recessed housings, this luminaire delivers incredible color accuracy with 90+ CRI and flexible dimming capabilities. Designed to boost energy efficiency, the LED light engine draws only 14.5 watts while achieving a light output to over 1200 lumens. The DQR6 is an ideal commercial, retail, institutional or residential downlight choice for retrofit or new construction. From LED color rendering and trim finishes to fixture performance, the designer style blends nicely with other fixtures in this design series.

FEATURES

- Compatible with most 5" recessed housings
- Suitable for use in IC Rated recessed housings
- 50,000 hour life expectancy
- >90 CRI with R9>50
- Easy installation with adjustable torsion springs
- Integrated baffle trim
- Dimmable to 10% with most standard dimmers
- Durable die cast construction
- Wet Location rated
- 5 Year Warranty

COMPATIBLE 5-6" HOUSINGS



PRODUCT SPECIFICATIONS

Series	Input Voltage (VAC)	Delivered Lumens (Lm)	System Level Power (W)	System Efficacy (Lm/W)	Color Rendering Index (CRI)
DQR6-10-120-4K-WH-BF	120	1283	14	88	90

ORDERING INFORMATION

Example: DQR6-10-120-3K-WH-BF

Series	Version	Voltage	CCT's	Trim
DQR6	10 (v1.0)	120(V)	2K (2700)	WH-BF (white baffle)
			3K (3000)	BK-BF (black baffle)*
			4K (4000)	NK-BF (nickel baffle)*
				OB-BF (oil-rubbed bronze baffle)*

