

# 15014A

## Airtight Shallow Housing 5" IC Line Voltage

### Product Description

Suitable for new construction in residential and commercial applications.  
IC rated. Suitable for direct contact with insulation.  
Use one 120V 13W-27W GU24 lamp (not included).

#### Construction

Airtight housing limits the exchange of air between ceiling plenum and heated/cooled areas.  
Washington State Energy Code approved to meet restricted airflow requirements.  
Adjustable socket bracket assures proper and consistent lamp positioning.  
7 1/2" height allows use in 2" x 8" joist construction.

#### Plaster Frame

Housing is secured to plaster frame with screws and can be removed for access to junction box.  
Housing adjusts from 1/2" to 1 1/2" to accommodate ceiling thickness.

#### Junction Box

Listed for through branch circuit wiring and includes several 3/4" knockouts.  
Four pry-outs with integral strain relief simplify Romex installation. Supplied with three push-in wire connectors.



#### Installation

Heavy-gauge NICOR captive hanger bars provide greater stability, allowing housing to be positioned at any point within a 24" joist span, then locked in place with set screws. Unique hanger bar lip design helps align can to joist. Four double-headed captive nails provide for ease of installation. Bars can be repositioned 90° on plaster frame without tools. Bars fit onto T-bar spine for quick alignment and can be permanently secured. Score lines allow bars to be shortened without tools to accommodate a 12" joist span.


Project


Catalog


Type

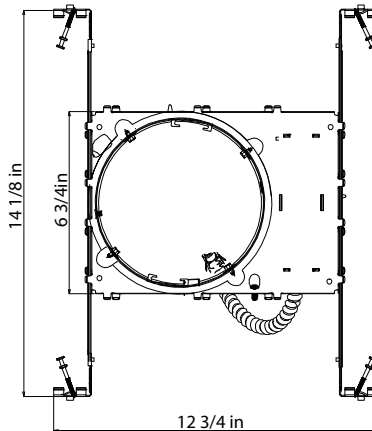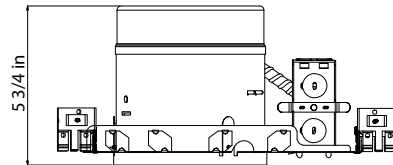


# 15014A Airtight Shallow Housing

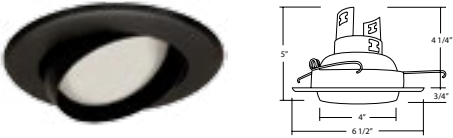Eyeball	Order No	Color	Maximum Lamp Rating
	15506BK	Black (shown)	75W   BR30/PAR30 OD: 6 1/2"
	15506PB	Polished Brass	
	15506OB	Oil Rubbed Bronze	
	15506WH	White	


Shower Trim	Order No	Color	Maximum Lamp Rating
	15509	White (shown)	40W   A19 1X13W PL OD: 6 1/2" Wet Location
	15509OB	Oil Rubbed Bronze	


Splay	Order No	Color	Maximum Lamp Rating
	15510	White (shown)	75W   BR30/PAR30 OD: 6 1/2" Wet Location

Baffle	Order No	Color	Maximum Lamp Rating
	15511BK	Black	75W   BR30/PAR30 OD: 6 1/2"
	15511BZ	Bronze	
	15511NK	Nickel	
	15511OB-ABZ	Oil Rubbed Bronze (Aged Bronze Ring)	
	15511OB-OB	Oil Rubbed Bronze (Oil Rubbed Bronze Ring) (shown)	
15511WH	White		

Shallow Cone Baffle	Order No	Color	Maximum Lamp Rating
	15512	Black	75W   PAR30L 50W   PAR30S OD: 6 1/2"

**15014A**     Airtight Shallow Housing

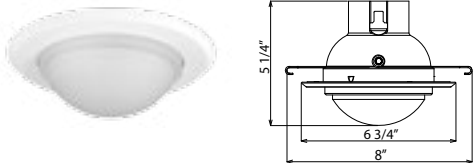Dome Shower Trim	Order No	Color	Maximum Lamp Rating
	15517WH	White	40W   A19 1 x 13W PL OD:6 3/4"

Open Trim	Order No	Color	Maximum Lamp Rating
	15519WH	White	50W   PAR30S OD: 6 1/2"