
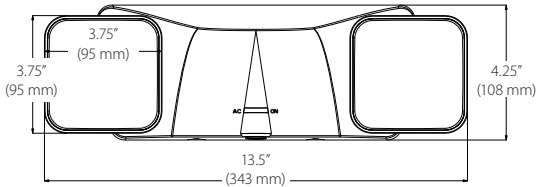


EML1

LED EMERGENCY LIGHT

EMERGENCY

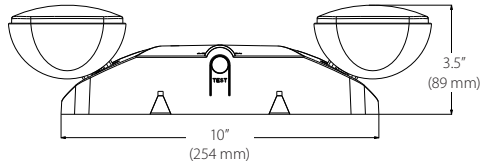

This LED thermoplastic emergency lighting unit combines a low-profile, contemporary design in an affordable package. The EML1 Series is available in white and offers universal mounting with testing button and a damp location listing. With fully adjustable heads, the EML1 Series complements any design application.

FEATURES

- 1.2 Watts per head
- Injection molded thermoplastic ABS housing
- UL-94V-0 flame rating - Flame Retardant
- 120-277V Dual Voltage Operation
- LED Indicator Light & Push Button Test Switch
- 90 Min capacity on emergency mode
- Universal mounting plate with EZ quick connect
- Damp Location Rated (0°C - 40°C)

PRODUCT SPECIFICATIONS

Series	Input Voltage	System Level Power	Emergency Battery
EML1	120-277V	2.4W	90 min

ORDERING INFORMATION

Example: EML1-10-UNV-WH

Series	Version	Voltage	Housing Color
EML1	10 (1.0)	UNV (120-277V)	WH (white)

