


# DLG56

## 5" - 6" LED GIMBLE DOWNLIGHT

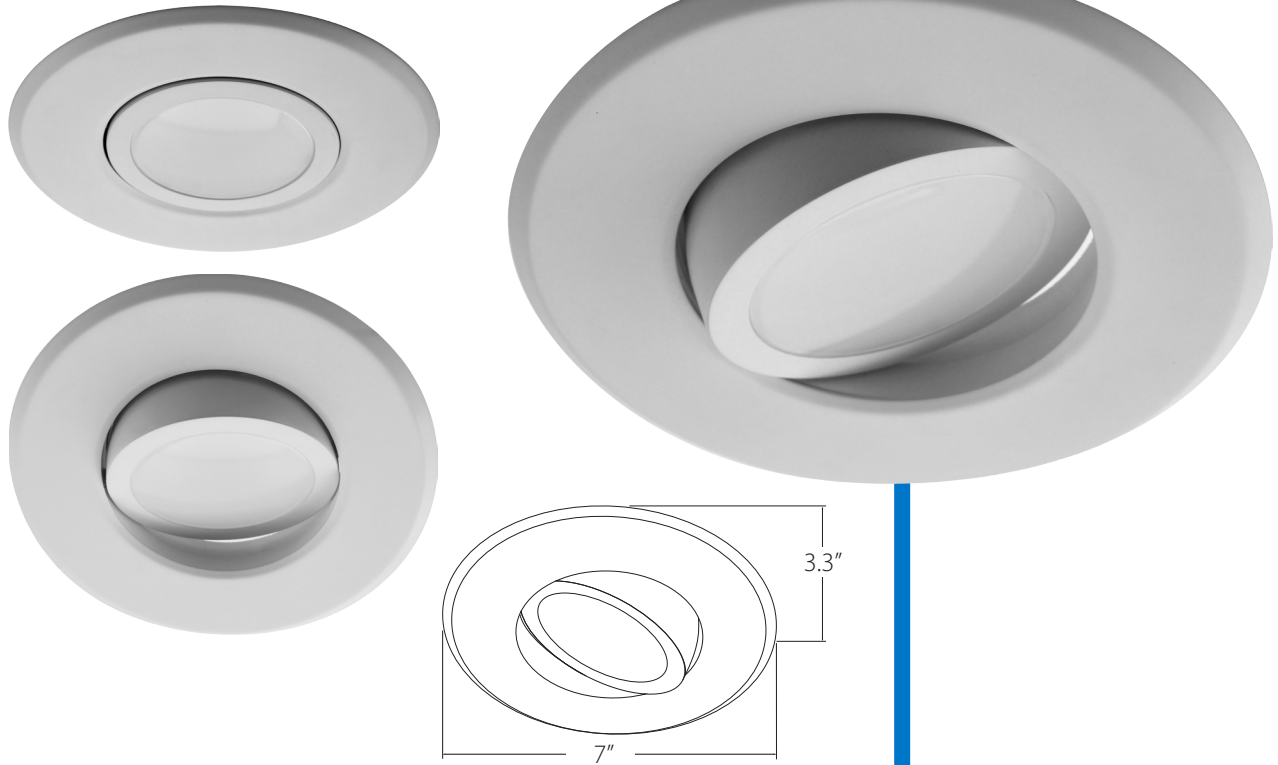

Part of NICOR's D-Series, the new DLG56 is the perfect 5" and 6" LED downlight for directional accent lighting. It's easy to use twist-and-turn design allows for fine adjustment of the gimbal position. The 360 degrees of rotation and 35 degrees of adjustable tilt in both directions makes the DLG56 suitable for sloped ceilings and wall wash. The sleek design enhances any interior space with its flush mounting and aesthetic appeal.

### FEATURES

- Durable stamped steel construction with die cast aluminum heat sink
- Polycarbonate diffuser and reflector cone create a uniform light distribution that reduces glare
- Greater than 90 CRI and an R9 greater than 50
- Dimmable to 10% with most standard dimmers
- Thermally protected, high efficiency driver standard
- Operating temperature rating of 0°F to 120°F (-18°C - 49°C)
- LM-79, LM-80 testing performed in accordance with IESNA standards
- Quick and easy installation with a screw-in Edison base (GU24 socket string available) and torsion spring mounting system



PRODUCT SPECIFICATIONS					
Series	Input Voltage (VAC)	Delivered Lumens (Lm)	System Level Power (W)	System Efficacy (Lm/W)	Color Rendering Index (CRI)
DLG56-10-120-3K-WH	120	1034	13	80	91

ORDERING INFORMATION					Example: DLG56-10-120-3K-WH
Series	Version	Voltage	CCT's	Trim Color	
DLG56	10 (1.0)	120	2K (2700) 3K (3000) 4K (4000)	WH (white)	